




Overview




CCTV Distribution Box Series 1 made of Stainless Steel Grade304 high quality and long time for use. they can accommodate the fiber from12-96 fiber . Cable entry 6 port use cable glands EG/PG29 depend on cable dia. The cable can be held the preformed holes by a 2 section cable inlet or cable feed through grommet.

Features

- One door lockable , IP 45
- Produced from of Stainless Steel Grade304 with thickness of 1.5mm.,Light weight and completed rust proof.
- Provide build in push handle lock twist at front door.
- Double folded gutter at door frame to increase rigidity and prevents water from entering while door is opened.
- Thickness CNC foam gasket for protection waterproof for body closure
- 4 welded studs for fixing mounting plate and service equipment inside.
- Surface finished cabinet with Powder coating.
- All screw or nut made of stainless steel
- Can support Splicetray , Universal Plug and Braker
- Size: 600 mm x 400 mm x 200 mm (HighxWidthxDepth)
- Can support splice tray 12 or 24 port maximum 8 ea
- Provide 6 knock out holes size 3/4" for cable entry.
- Can support FAN 1x4 maximum 4 ea " for air flow
- Cooled air under the roof.
- Complete set tools for hang on pole and support 4 hole for wall type
- Can adjust for support steel plate for stand UPS 500-1000VA below wall box
- Support cable grand 6 slot

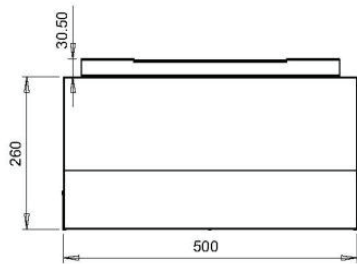

MainBody Size= 400x600x200

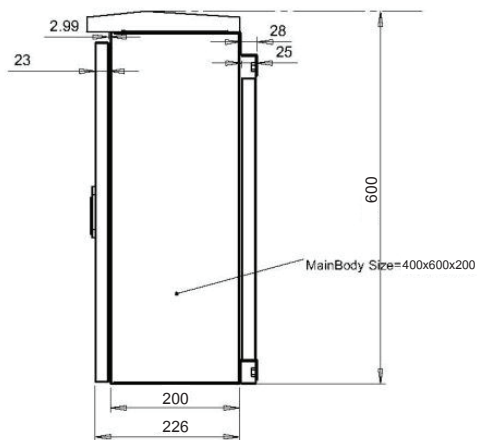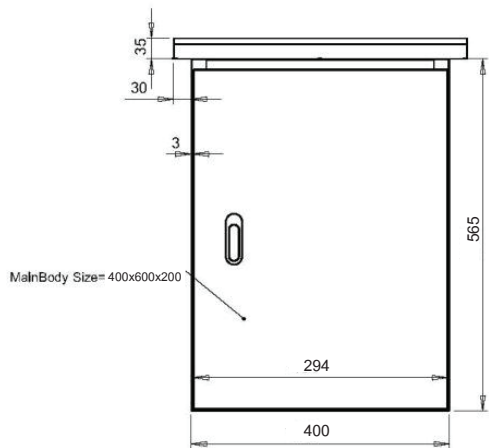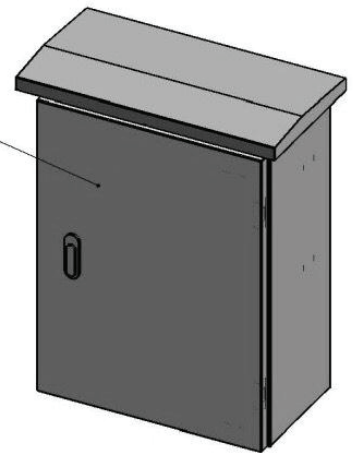

Distributor